



# Excellent Graphical Presentation

One of the great features of the CNT-90 is the graphical display and the menu oriented settings. The non-expert can easily make correct settings without risking costly mistakes.

The multi-parameter display with auxiliary measurement values such as  $V_{max}/V_{min}/V_{p-p}$  in frequency measurements, and frequency/attenuation/phase, eliminates the need for extra test instruments and provides direct answers to frequently asked questions, like “What is the attenuation and phase shift of this filter?”

Measurement values are presented both numerically and graphically. The graphical presentation of results (histograms, trends etc.) gives a much better understanding of the nature of jitter. It also provides you with a much better view of changes vs time, from slow drift to fast modulation (trend plot). Three statistical views of the same data set can be viewed: Numerical, Histogram and Trend. It is very easy to capture and toggle between views of the same data (see fig. 4, 5 & 6).

When adjusting a frequency source to given limits, the graphic display gives fast and accurate visual calibration guidance.



Figure 1: Display showing phase value, frequency, attenuation  $V_A/V_B$ , and auxiliary parameters.



Figure 4: Display showing different statistical parameters viewed at the same time.



Figure 2: Measure function selection menu, shown with measured results.



Figure 5: Display showing the trend (signal over time) of sampled data.



Figure 3: Input parameter setting menu shown with measured result.



Figure 6: The same result as in figure 5, now displayed as a histogram.

# CNT-90 Technical Specifications

## Measuring Functions

All measurements are displayed with a large *main parameter* value and smaller *auxiliary parameter* values (with less resolution). Some measurements are only available as auxiliary parameters.

### Frequency A, B, C

#### Range:

Input A, B: 0.002 Hz to 300 MHz

Input C (option): Up to 3, 8, 14 or 20 GHz

**Resolution:** 12 digits in 1s measuring time (normal)

**Aux. Parameters:** Vmax, Vmin, Vp-p

### Frequency Burst A, B, C (opt. 14/14B)

Frequency and PRF of repetitive burst signals can be measured without external control signal and with selectable start arming delay.

**Functions:** Frequency in burst (in Hz)  
PRF (in Hz)

#### Range:

Input A, B, C: See Frequency spec.

#### Minimum Burst Duration:

Down to 40 ns

#### Minimum Pulses in Burst:

Input A or B: 3 (6 above 160 MHz)

Input C: 3 x prescaler factor

**PRF Range:** 0.5 Hz to 1 MHz

**Start Delay:** 10 ns to 2 sec., 10 ns resolution

**Aux. Parameter:** PRF

### Period A, B, C

**Mode:** Single, Average

#### Range:

Input A, B: 3.3 ns to 1000 sec. (single, average)

Input C (option): 10 ns down to 330, 125, 70 or 50 ps

#### Resolution:

CNT-90 100 ps (single); 12 digits/s (average)

**Aux. Parameters:** Vmax, Vmin, Vp-p

### Ratio A/B, B/A, C/A, C/B

**Range:** (10<sup>-9</sup>) to 10<sup>11</sup>

#### Input Frequency:

Input A, B: 0.1 Hz to 300 MHz

Input C (option): Up to 3, 8, 14 or 20 GHz

**Aux. Parameters:** Freq 1, Freq 2

### Time Interval A to B, B to A, A to A, B to B

#### Range:

Normal Calculation: 0 ns to +10<sup>6</sup> sec.

Smart Calculation: -10<sup>6</sup> sec. to +10<sup>6</sup> sec.

#### Resolution:

CNT-90 100 ps

**Min. Pulse Width:** 1.6 ns

**Smart Calculation:** Smart Time Interval to determine sign (A before B or A after B)

### Positive and Negative Pulse Width A, B

**Range:** 2.3 ns to 10<sup>6</sup> sec.

**Min. Pulse Width:** 2.3 ns

**Aux. Parameters:** Vmax, Vmin, Vp-p

### Rise and Fall Time A, B

**Range:** 1.5 ns to 10<sup>6</sup> sec.

**Trigger Levels:** 10% and 90% of signal amplitude

**Min. Pulse Width:** 1.6 ns

**Aux. Parameters:** Slew rate, Vmax, Vmin

### Positive and Negative Duty Factor A, B

**Range:** 0.000001 to 0.999999

**Freq. Range:** 0.1 Hz to 300 MHz

**Aux. parameters:** Period, pulse width

### Phase A Relative B, B relative A

**Range:** -180° to +360°

**Resolution:**

Single-cycle: 0.001° to 10 kHz, decreasing to 1° > 10 MHz. Resolution can be improved via averaging (statistics)

**Freq. Range:** up to 160 MHz

**Aux. Parameters:** Freq (A), Va/Vb (in dB)

### Vmax, Vmin, Vp-p A, B

**Range:** -50V to +50V, -5V to +5V

Range is limited by the specification for max input voltage without damage (see input A, B)

**Freq. Range:** DC, 1 Hz to 300 MHz

**Mode:** Vmax, Vmin, Vp-p

#### Resolution:

CNT-90 3 mV

#### Uncertainty (5V range, typical):

DC, 1Hz to 1kHz: 1% +15 mV

1 kHz to 20 MHz: 3% +15 mV

20 to 100 MHz: 10% +15 mV

100 to 300 MHz: 30% +15 mV

**Aux parameters:** Vmin, Vmax, Vp-p

### Time stamping A, B, C

Raw time stamp data together with pulse counts on inputs A, B or C, accessible via GPIB or USB only.

**Max Sample Speed:** See GPIB specifications

**Max Frequency:** 160 MHz

#### Timestamp Resolution:

CNT-90 100 ps

## Input and Output Specifications

### Inputs A and B

#### Frequency Range:

DC-Coupled: DC to 300 MHz

AC-Coupled: 10 Hz to 300 MHz

**Impedance:** 1 MΩ // 20 pF or 50Ω (VSWR ≤ 2:1)

**Trigger Slope:** Positive or negative

**Max. Channel Timing Difference:** 500 ps

#### Sensitivity:

DC-200 MHz: 15 mVrms

200-300 MHz: 25 mVrms

**Attenuation:** x1, x10

**Dynamic Range (x1):** 30 mV p-p to 10V p-p within ±5V window

**Trigger Level:** Read-Out on display

**Resolution:** 3 mV

**Uncertainty (x1):** ±(15 mV + 1% of trigger level)

**AUTO Trigger Level:** Trigger level is automatically set to 50% point of input signal (10% and 90% for Rise/Fall Time)

#### AUTO Hysteresis:

**Time:** Min hysteresis window (hysteresis compensation)

**Frequency:** One third of input signal amplitude

**Analog LP Filter:** Nominal 100 kHz, RC-type.

**Digital LP Filter:** 1 Hz to 50 MHz cut-off frequency

#### Max Voltage Without Damage:

1 MΩ: 350V (DC + AC pk) to 440 Hz, falling to 12Vrms at 1 MHz

50Ω: 12Vrms

**Connector:** BNC

### Input C (Option 10 and option 10S)

#### Operating Input Voltage Range option 10:

100 to 300 MHz: 20 mVrms (-21 dBm) to 12Vrms

0.3 to 2.5 GHz: 10 mVrms (-27 dBm) to 12Vrms

2.5 to 2.7 GHz: 20 mVrms (-21 dBm) to 12Vrms

2.7 to 3.0 GHz: 40 mVrms (-15 dBm) to 12Vrms

#### Operating Input Voltage Range option 10S:

0.1 to 2.7 GHz: 10 mVrms (-27 dBm) to 12Vrms

2.7 to 3.0 GHz: 20 mVrms (-21 dBm) to 12Vrms

**Prescaler Factor:** 16

**Impedance:** 50 Ω nominal, VSWR <2.5:1

#### Max Voltage without Damage:

12Vrms, pin-diode protected

**Connector:** Type N Female

### Input C (Option 13)

#### Operating Input Voltage Range:

200 to 300 MHz: 40 mVrms to 7 Vrms (typ.)

300 to 500 MHz: 20 mVrms to 7 Vrms

0.5 to 3.0 GHz: 10 mVrms to 7 Vrms

3.0 to 4.5 GHz: 20 mVrms to 7 Vrms

4.5 to 6.0 GHz: 40 mVrms to 7 Vrms

6.0 to 8 GHz: 80 mVrms to 7 Vrms

**Prescaler Factor:** 256

**Impedance:** 50Ω nominal, VSWR <2.5:1

**Max Voltage Without Damage:** 7V rms

**Connector:** Type N Female

### Input C (Option 14 and 14B)

**Freq. Range:** 0.2 to 14 GHz (opt. 14)

0.25 to 20 GHz (opt. 14B)


#### Operating input voltage range :

250 to 500 MHz: -21 to +27 dBm

0.5 to 14 GHz: -27 to +27 dBm

14 to 18 GHz: -27 to +27 dBm (Option 14B only)

18 to 20 GHz: -21 to +27 dBm (Option 14B only)

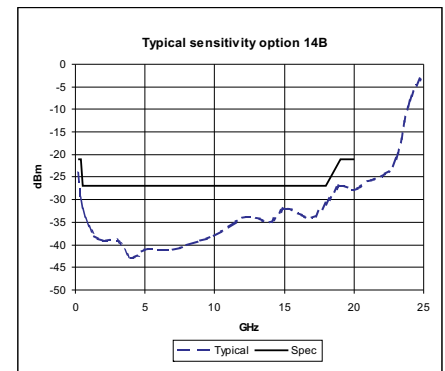

**Prescaler Factor:** 128

**Impedance:** 50Ω nominal, VSWR <2.0:1

**AM tolerance:** > 90% within sensitivity range

**Max Voltage Without Damage:** +27dBm

**Connector:** Type precision N Female

### Rear Panel Inputs and Outputs

**Reference Input:** 1, 5, or 10 MHz; 0.1 to 5Vrms sine; impedance ≥ 1 kΩ

**Reference Output:** 10 MHz; >1 Vrms sine into 50Ω

**Arming Input:** Arming of all measuring functions

**Impedance:** Approx. 1 kΩ

**Freq. Range:** DC to 80 MHz

**Rear Panel Measurement Inputs:** A, B, C (opt. 11/90)

**Impedance:** 1 MΩ//50 pF or 50Ω (VSWR ≤ 2:1)

**Connectors:** SMA female for rear input C  
BNC for all other inputs/outputs

## Auxiliary Functions

### Trigger Hold-Off

**Time Delay Range:** 20 ns to 2 sec., 10 ns resolution

### External Start and Stop Arming

**Modes:** Start, Stop, Start and Stop Arming

**Input Channels:** A, B or E-rear panel

**Max Rep. Rate for Arming Signal:**

Channel A,B: 160 MHz

Channel E: 80 MHz

#### Start Time Delay Range:

20 ns to 2 sec., 10 ns resolution

## Statistics

**Functions:** Maximum, Minimum, Mean, Δmax-Min, Standard Deviation and Allan Deviation

**Display:** Numeric, histograms or trend plots

**Sample Size:** 2 to 2 x 10<sup>9</sup> samples

**Limit Qualifier:** OFF or Capture values above/below/inside or outside limits

## Measurement Pacing

*Pacing Time Range:* 4 μs to 500 sec.

## Mathematics

**Functions:** (K\*X+L)/M and (K/X+L)/M. X is current reading and K, L and M are constants; set via keyboard or as frozen reference value (X<sub>0</sub>)

## Other Functions

**Measuring Time:** 20 ns to 1000 sec. for Frequency, Burst, and Period Average. Single cycle for other measuring functions

**Timebase Reference:** Internal, External or Automatic

**Display Hold:** Freezes result, until a new measurement is initiated via Restart

**Limit Alarm:** Graphical indication on front panel and/or SRQ via GPIB, plus pulse output connector (CNT-91)

*Limit Values:* Lower limit, Upper limit

*Settings:* OFF or Alarm if value is above/below/inside or outside limits

*On Alarm:* STOP or CONTINUE

*Display:* Numeric + Graphic

**Stored Instrument Set-ups:** 20

Instrument setups can be saved/re-called from internal non-volatile memory. 10 can be user protected.

**Display:** Backlit LCD Graphics screen for menu control, numerical read-out and status information

*Number of Digits:* 14 digits in numerical mode

*Resolution:* 320\*97 pixels

## GPIB Interface

**Compatibility:** IEEE 488.2-1987, SCPI 199953131A compatibility mode

## Interface Functions:

SH1, AH1, T6, L4, SR1, RL1, DC1, DT1, E2

## Max. Measurement Rate

*GPIB:* 5k readings/s (block mode)

500 readings/s (individual GET trig'ed)

**To Internal Memory:** 250k readings/s

**Internal Memory Size:** Up to 750k readings.

## USB Interface

**USB Version:** 2.0 Full speed (11 Mbits/s)

## Calibration

**Mode:** Closed case, electronic calibration, menu controlled

**Cal. Frequencies:** 0.1, 1, 5, 10, 1.544 and 2.048 MHz

## Option 23/90 Battery Unit

**Battery Type:** Lilon, 90Wh

## External DC input:

10 to 18V dc; max 6 A

## Operating temp. range:

0 to 40 degrees C

## Storage:

-20 to +60 °C: 1 month  
 -20 to +45 °C 3 months  
 -20 to +20 °C 1 year

## Battery operating time (at 25 degrees C):

ON: >4.5 hours  
 Stand-by: >24 hours

**Charging:** Automatically when AC or ext DC is connected

## Battery status indicator:

On-screen with Low battery warning

**Weight:** 2.3 kgs

## General Specifications

### Environmental Data

**Class:** MIL-PRF-28800F, Class 3

**Operating Temp:** 0°C to +50°C

**Storage Temp:** -40°C to +71°C

**Humidity:** 5%-95% (10°C-30°C)  
 5%-75% (30°C-40°C)  
 5%-45% (40°C-50°C)

**Altitude:** 4,600 meters

**Vibration:** Random and sinusoidal according to MIL-PRF-28800F, Class 3

**Shock:** Half-sine 30G per MIL-PRF-28800F Bench handling

**Transit drop test:** Heavy-duty transport case and soft carrying case tested according to MIL-PRF-28800F

**Reliability:** MTBF 30,000 hours (calculated)

**Safety:** EN 61010-1, pollution degree 2, meas cat I, CSA C22.2 No 1010-1, CE

**EMC:** EN 61326 (1997); A1 (1998), increased test levels according to EN 50082-2, Group 1, Class B, CE

## Power Requirements

### Max. configuration:

90 to 265V rms, 45 to 440 Hz, <40W, <60W if battery option.

## Dimensions and Weight

### Width x Height x Depth:

210 x 90 x 395 mm  
 (8.25 x 3.6 x 15.6 in)

### Weight:

Net 2.7 kg (5.8 lb),  
 Shipping app. 3.5 kg (app. 7.5 lb)

## Ordering Information

### Basic Model

**CNT-90** 300 MHz, 100 ps Timer/Counter including Standard Time Base

### Included with Instrument:

18 months product warranty, line cord, user documentation on CD, and Certificate of Calibration

## Input Frequency Options

**Option 10** 3 GHz Input C  
**Option 10S** 3 GHz Input C (improved Sensitivity)  
**Option 13** 8 GHz Input C  
**Option 14** 14 GHz Input C  
**Option 14B** 20 GHz Input C

## Optional Accessories

**Option 11/90** Rear Panel Inputs  
**Option 22/90** Rack-Mount Kit  
**Option 23/90** Battery Unit  
**Option 27** Carrying Case - soft  
**Option 27H** Heavy-duty Hard Transport Case  
**Option 29/90** TimeView Modulation domain Analysis SW for CNT-90  
**Option 90/01** Calibration Certificate with Protocol; Standard oscillator  
**Option 90/06** Calibration Certificate with Protocol; Oven oscillator  
**Option 90/00** Calibration Certificate with Protocol; Hold-over frequency ageing/week  
**Option 95/03** Extended warranty from 18 months to 3 years  
**Option 95/05** Extended warranty from 18 months to 5 years  
**OM-90** Users Manual English (printed)  
**PM-90** Programmers Manual English (printed)  
**SM-90** Service Manual English  
**GS-90-EN** Getting Started English  
**GS-90-FR** Getting Started French  
**GS-90-DE** Getting Started German

*Specifications subject to change without prior notice*  
 4031 600 90101 - rev. 19 May 2010

## US: Pendulum Instruments Inc

5811 Racine Street; Oakland, CA 94609-1519, USA  
 Voice:(510)-428-9488 Fax: (510)-428-9469

## International: Pendulum Instruments AB

PO Box 20020, SE-16102 Bromma, Sweden  
 Voice: +46 8 598 510 00 Fax: +46 8 598 510 40

## www.pendulum-instruments.com

- Experts in time & frequency calibration, measurement and analysis

Pendulum Instruments is a company of the Orolia Group

## Time Base Options

Option model:	std	19/90	30/90	40/90
Time base type:	Standard	OCCO	OCCO	OCCO
Uncertainty due to:				
-Ageing. per 24h	n.a.	<5x10 <sup>-9</sup> (1)	<5x10 <sup>-10</sup> (1)	<3x10 <sup>-10</sup> (1)
per month	<5x10 <sup>-7</sup>	<6x10 <sup>-8</sup>	<1x10 <sup>-8</sup>	<3x10 <sup>-9</sup>
per year	<5x10 <sup>-6</sup>	<2x10 <sup>-7</sup>	<5x10 <sup>-8</sup>	<1.5x10 <sup>-8</sup>
-Temperature variation: 0°C-50°C	<1x10 <sup>-5</sup>	<5x10 <sup>-8</sup>	<5x10 <sup>-9</sup>	<2.5x10 <sup>-9</sup>
20°C-26°C (typ. values)	<3x10 <sup>-6</sup>	<2x10 <sup>-8</sup>	<1x10 <sup>-9</sup>	<4x10 <sup>-10</sup>
Short term stability: τ = 1s	not specified	<1x10 <sup>-10</sup>	<1x10 <sup>-11</sup>	<5x10 <sup>-12</sup>
(root Allan Variance) τ = 10s		<1x10 <sup>-10</sup>	<1x10 <sup>-11</sup>	<5x10 <sup>-12</sup>
Power-on stability				
-Deviation vs final value after 24h on time, after a warm-up time of:	n.a.	<1x10 <sup>-7</sup>	<1x10 <sup>-8</sup>	<5x10 <sup>-9</sup>
	30 min	30 min	10 min	10 min
Typical total uncertainty, for operating temperature 20°C to 26°C, at 2σ (95%) confidence interval:				
- 1 year after calibration	<7x10 <sup>-6</sup>	<2.4x10 <sup>-7</sup>	<0.6x10 <sup>-7</sup>	<1.8x10 <sup>-8</sup>
- 2 years after calibration	<1.2x10 <sup>-5</sup>	<4.6x10 <sup>-7</sup>	<1.2x10 <sup>-7</sup>	<3.5x10 <sup>-8</sup>

1) After 1 month of continuous operation